




Stainless Steel Short Link Chain

- Generally to DIN 766.
- Available in Grade 50 and Grade 30.
- Material AISI 316.
- Supplied with proof load test certificate.


| dia. (mm) | P (mm) | B (mm) | weight (kgs/mtr) | grade 50 | | grade 30 | |
|--------------|-----------|-----------|---------------------|-----------|-------|-----------|-------|
| | | | | WLL (kgs) | code | WLL (kgs) | code |
| 4 | 16 | 14 | 0.32 | 315 | J0802 | 175 | J0812 |
| 5 | 18.5 | 17 | 0.50 | 490 | - | 295 | J0811 |
| 6 | 18.5 | 20 | 0.75 | 700 | J0803 | 420 | J0813 |
| 8 | 24 | 26 | 1.35 | 1,260 | J0804 | 750 | J0814 |
| 10 | 28 | 34 | 2.25 | 1,960 | J0805 | 1,170 | J0815 |

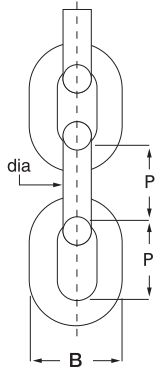

Stainless Steel Long Link Chain

- Generally to DIN 763.
- Available in Grade 50 and Grade 30.
- Material AISI 316.
- Supplied with proof load test certificate.

| dia. (mm) | P (mm) | B (mm) | weight (kgs/mtr) | grade 50 | | grade 30 | |
|--------------|-----------|-----------|---------------------|-----------|-------|-----------|-------|
| | | | | WLL (kgs) | code | WLL (kgs) | code |
| 4 | 32 | 16 | 0.27 | 210 | J0702 | 100 | J0712 |
| 6 | 42 | 24 | 0.63 | 470 | J0703 | 224 | J0713 |
| 8 | 52 | 32 | 1.1 | 840 | J0704 | 400 | J0714 |
| 10 | 65 | 40 | 1.75 | 1,310 | J0705 | 630 | J0715 |



NEVER EXCEED MAXIMUM CAPACITY

Ensure operator follows safe use instruction guidelines